

# ARC-C CUTOFF AVENUE

DECORATIVE LUMINAIRE

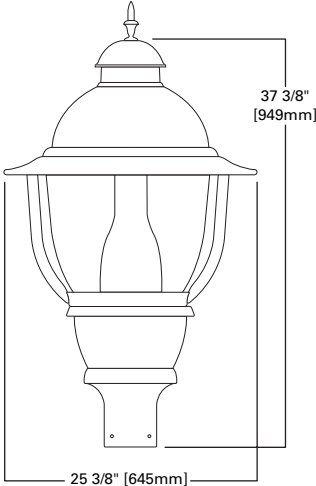
50-400W  
MH/HPS/QL



STREETWORKS™



**DARK SKY  
COMPLIANT** **CO**  
Cutoff



**TOPS + FINIALS**

All hard mount tops are made of spun aluminum. Top provided with toolless access for ease of maintenance. Finials are manufactured of cast aluminum.

**REFLECTOR**

Highly specular multi-faceted CVL reflector system provides a Type III or V Cutoff Distribution. Vertical lamp position maximizes light output, ensures a uniform distribution and minimizes direct glare.

**GLOBE**

Clear injection molded 9" globe is HID acrylic or optional polycarbonate. Polycarbonate not recommended for MH applications.

**DECORATIVE CHIMNEY**

Chimney provided with brushed aluminum finish standard. Optional copper finished accents available for chimney and access top.

**CAGE ASSEMBLIES**

Two (2) uprights are manufactured of cast aluminum. Banding is spun aluminum. All cage assemblies are mounted to the exterior of the housing via four (4) stainless steel fasteners. A variety of finishes are available.

**ELECTRICAL**

Available up to 400W MH and 250W HPS. Ballast assembly is mounted on a removable tray with quick disconnects for ease of installation and maintenance. Plug in starter standard when applicable. Terminal block is hard mounted to the casting and easily accessible through the door's wide entryway. UL listing and optional induction fluorescent lamp available.

**HOUSING**

Heavy duty-cast aluminum housing and door. Wide handhole provide toolless entry for access to plug-in starters and optional NEMA twistlock PCR. 1" ANSI wattage/source label. Fixture is 3G vibration rated.

**MOUNTING**

Post top mount fits 3" OD tenons. Four (4) stainless steel fasteners standard.

**FINISH**

Standard polyester powder coat finish in black. For more color options see optional color or consult your Streetworks representative for more information.

**EPA:**

Effective Projective Area: 2.1

**SHIPPING DATA**

Approximate Net Weight:

50 lbs. (23 kgs.)

**ORDERING INFORMATION**

**SAMPLE NUMBER:** ARC25MWW5C652

PRODUCT FAMILY	LAMP WATTAGE <sup>3</sup>	LAMP TYPE <sup>3</sup>	BALLAST TYPE <sup>3</sup>	VOLTAGE <sup>3</sup>	REFRACTOR TYPE	CAGE TYPE <sup>7,8</sup>	TOP TYPE <sup>7</sup>	FINIAL TYPE	OPTIONS (See Below)
ARC=Architectural	50=50W 70=70W 85=85W <sup>1</sup> 10=100W 15=150W 17=175W 25=250W 40=400W <sup>2</sup>	M=Metal Halide <sup>4</sup> S=High Pressure Sodium Q=Induction <sup>1</sup>	R=Reac./NPF <sup>5</sup> H=Reac./HPF N=Hi. Reac./NPF P=Hi. Reac./HPF W=CWA K=10KV CWA <sup>6</sup> I=Induction <sup>1</sup>	2=120V 0=208V 4=240V 7=277V 8=480V 9=347V W=Multi-Tap wired 120V N=Multi-Tap wired 277V	3C=Cutoff III 5C=Cutoff V	6=Avenue X=None	5=Avenue (Top Access)	2=Modern 3=Architectural	

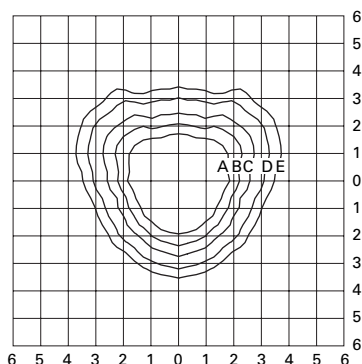
**OPTIONS** [Must be ordered in alphanumeric order]

**OPTIONS** (add as suffix)  
1=Single Fuse (120 or 277V)  
2=Double Fuse (208, 240, or 480V)  
Y=Black Chimney  
4=Internal NEMA photocontrol Receptacle  
P=Polycarbonate Refractor<sup>9</sup>  
WH=White  
BZ=Bronze  
AP=Grey  
DP=Dark Platinum  
H=Hartford Green  
U=UL/CSA Listed  
C=Copper Accents<sup>10</sup>

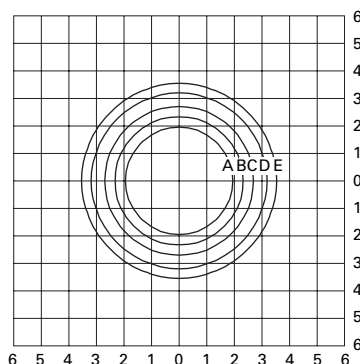
**OPTIONAL COLORS** [Standard color is black, other finish colors available. Consult your Cooper Lighting representative]

				
WH White	BZ Bronze	AP Grey	DP Dark Platinum	H Hartford Green

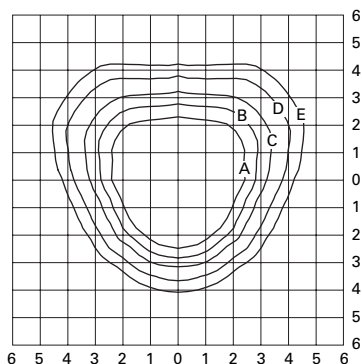
NOTE: 1 85W QL Induction only. 120 or 240V only. 2 Metal Halide only. Not available in 480V. 3 Refer to technical section for lamp/ballast/voltage compatibility. 4 Medium-base lamp standard for 150W and below Metal Halide. 400W Metal Halide requires reduced jacket ED28 lamp. 5 Available in 120V only. 6 Available 50-150W, 120/240 or single voltage only. 7 Avenue Cage must be used with Avenue Top. Avenue Top is available without cage. 8 Cage Type 6 will be finished same color as base. 9 Polycarbonate parts used with Metal Halide lamps will eventually yellow. 10 Chimney and Access Top copper finished.

**ARC15S3C.IES**

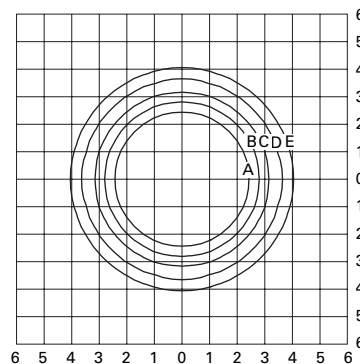
150-Watt HPS  
16,000-Lumen Clear ED-23.5 Lamp  
Type III Cutoff

**ARC15S5C.IES**

150-Watt HPS  
16,000-Lumen Clear ED-23.5 Lamp  
Type V Cutoff

**ARC17M3C.IES**

175-Watt MH  
14,000-Lumen Clear ED-28 Lamp  
Type III Cutoff

**ARC17M5C.IES**

175-Watt MH  
14,000-Lumen Clear ED-28 Lamp  
Type V Cutoff

**FOOTCANDLE TABLE**

Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting Height	Footcandle Values for Isofootcandle Lines				
	A	B	C	D	E
<b>ARC15S3C.IES</b>					
10'	4.50	2.25	1.12	0.45	0.22
15'	2.00	1.00	0.50	0.20	0.10
20'	1.12	0.56	0.28	0.11	0.05

**ARC15S5C.IES**

10'	4.50	2.25	1.12	0.45	0.22
15'	2.00	1.00	0.50	0.20	0.10
20'	1.12	0.56	0.28	0.11	0.05

**FOOTCANDLE TABLE**

Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting Height	Footcandle Values for Isofootcandle Lines				
	A	B	C	D	E
<b>ARC17M3C.IES</b>					
10'	2.00	1.00	0.50	0.20	0.10
15'	0.88	0.44	0.22	0.09	0.04
20'	0.50	0.25	0.3	0.05	0.03

**ARC17M5C.IES**

10'	2.00	1.00	0.50	0.20	0.10
15'	0.88	0.44	0.22	0.09	0.04
20'	0.50	0.25	0.3	0.05	0.03